

COR 80


Cercevea Ascunsa

Design elegant cu linii drepte in care canalul este ascuns in spatele tocului, maximizand astfel zona vitrata si intrarea luminii. In plus ofera o performanta termica si acustica excelenta, datorita barierei termice de 45 mm si o capacitate de sticla de pana la 51 mm, care permite instalarea geamului triplu.

CARACTERISTICI

Coeficient de transfer termic		$U_w \geq 0,8 \text{ (W/m}^2\text{K)}$
Izolare acustica		Rw pana la 46 dB
Permeabilitate la aer		Clasa 4
Etanseitate la apa		Clasa E1650
Rezistenta la vant		Clasa C5

Test de referinta 1,23 x 1,48 m / 2 foi

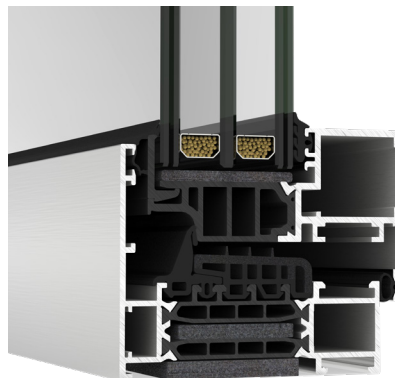

POSIBILITATI



FERONERIE
SIGURANTA



FERONERIE
ASCUNSA




MANER
ASCUNSA




DRENARE
ASCUNSA

POSIBILITATI DE DESCHIDERE



Deschidere interioara

Batanta
Oscilo-batanta
Oscilanta

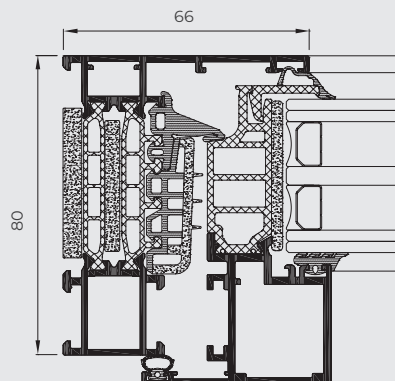

Sectiuni

Toc 80 mm, Cercevea 80 mm

Latime Poliamida

45 mm

Grosime Profil

Fereastră 1,9 mm

Vitrare

Max. 51 mm, Min. 36 mm

Dimensiuni maxime cercevea

Solutie Standard:

Latime (L) 1300 mm, Inaltime (H) 2400 mm

Feronerie HD (Deschidere Batanta):

Latime (L) 1200 mm, Inaltime (H) 3500 mm

Greutate maxima cercevea

160 kg

Primul **maner invizibil** de pe piata



Solutie pentru sistemele de cercevea ascunsa: **COR 80 FA si COR 70 FA.**

Dimensiuni: **27,5 mm (L) x 234 mm (H).**

Ergonomie, robustete si usurinta in manevrele de deschidere si inchidere.

O estetica cu adevarat curata care simuleaza un element fix, cand este intradevar un sistem cu deschidere batanta sau oscilobatanta.

ARCH
INVISIBLE
BY CORTIZO



90°

Maner exclusiv integrat in cercevea,
imperceptibila in vederea frontala.
Possibilitatea de a folosi balamale
ascunse care consolideaza puritatea
estetica a intregului.