

COR 80

Industrial

Cu o adancime a tocului de 80 mm, seria COR 80 Industrial raspunde celor mai exigente cerinte climatice datorita barierei sale termice cu poliamide tubulare de 45 mm si incorporarii profilelor din poliolefina reticulate atat in adancimea sticlei, cat si in interiorul tocului si cercevelei.

CARACTERISTICI

Coeficient de transfer termic		$U_w \geq 0,8 \text{ (W/m}^2\text{K)}$
Izolare acustica		Rw pana la 46 dB
Permeabilitate la aer		Clasa 4
Etanseitate la apa		Clasa E1950
Rezistenta la vant		Clasa C5
Rezistenta la efracție		Grado RC2 (WK2)

Test de referinta 1,23 x 1,48 m / 2 foi



Sețiuni

Toc 80 mm, Cercevea 88 mm

Grosime Profil

1,5 mm

Latime Poliamida

45 mm

Vitrare

Max. 73 mm, Min. 16 mm


Dimensiuni maxime cercevea

Latime (L) 1500 mm, Inaltime (H) 2600 mm

Greutate maxima cercevea

160 kg

Consultati greutatea si dimensiunile maxime conform tipologiei

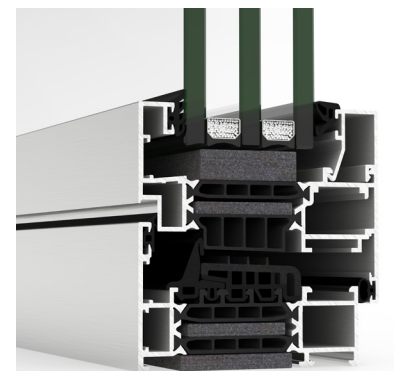

Posibilitati estetice:

Cercevea: Dreapta

Bagheta: Dreapta sau curbata

POSIBILITATI



FERONERIE
SIGURANTA



FERONERIE
ASCUNSA




DRENARE
ASCUNSA



ACCESIBILITATE

POSIBILITATI DE DESCHIDERE

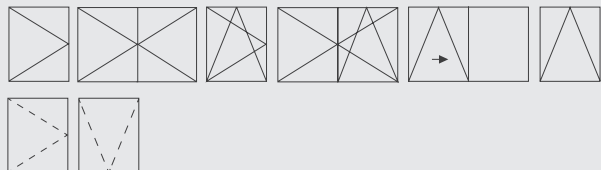


Deschidere interioara

Batanta
Oscilo-batanta
Oscilo-paralela
Oscilanta

Deschidere exteriora

Batanta
Proiectanta-glisanta

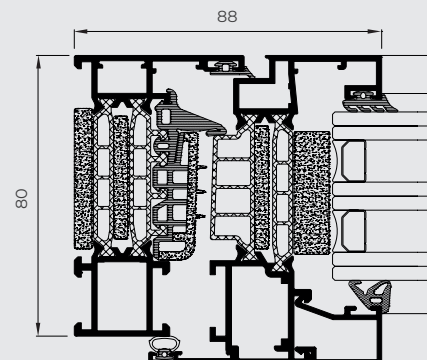



COR 80 INDUSTRIAL