


USA

Millennium 2000

USI

Sistem de usa pietonala fara bariera termica, pentru spatii comerciale si cladiri rezidentiale, cu balamale aplicate ce pot suporta pana la 180 Kg pe foaie.

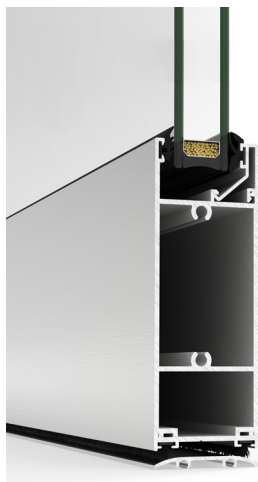

Sezioni

Toc 45 mm, Cercevea 45 mm

Grosime Profil

Usa 2,0 mm

Vitrare

Max. 30 mm, Min. 3 mm

Dimensiuni maxime cercevea

Batanta:

Latime (L) 1450 mm, Inaltime (H) 3000 mm

Dublu batanta:

Latime (L) 1100 mm, Inaltime (H) 3000 mm

Greutate maxima cercevea

180 kg

Consultati greutatea si dimensiunile maxime conform tipologiei

POSIBILITATI



ACCESIBILITATE

Posibilitati estetice:

Cercevea: Dreapta / Bagheta: Dreapta sau curbata

CARACTERISTICI

Coeficient de transfer termic  $U_w \geq 2,3 \text{ (W/m}^2\text{K)}$


Izolarea acustica  R_w pana la 38 dB

Impact cu un corp moale  Clasa 5 (max.)

Test realizat dupa normativa EN 13059

Test de referinta 1,80 x 2,20 m / 2 foi. Sticla laminata 3+3.

POSIBILITATI DE DESCHIDERE

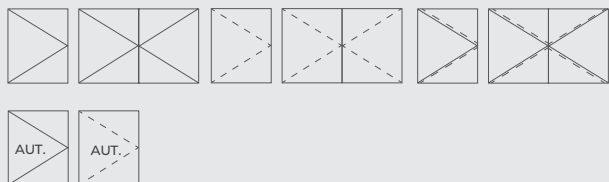

Deschidere interioara

Batanta

Batanta automata


Deschidere exteriora

Batanta

Batanta automata

Deschidere dublu batanta

Batanta

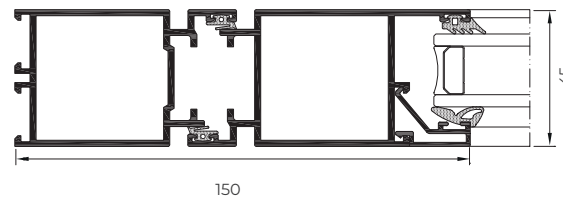



SISTEM GLISANTA AUTOMATA

SISTEM

Glisanta Automata

USI

Sistem de usa glisanta cu deschidere automata conceput pentru a rezolva problema intrarilor cu trafic intens (birouri, centre comerciale, spitale...) deoarece garanteaza o circulatie fluida si in siguranta a persoanelor in cazuri de urgenta.

POSIBILITATI



AUTOMATIZARE



ACCESIBILITATE



Sectioni

Toc 45 mm

Cercevea 45 mm (Motor EC-drive)

Cercevea 25 mm (Motor Slimdrive)

Grosime Profil

Usa 2,0 mm

Vitrare

Max. 30 mm, Min. 3 mm


Dimensiuni maxime cercevea

Latime (L) 2000 mm, Inaltime (H) 3000 mm

Greutate maxima cercevea

120 Kg

Consultati greutatea si dimensiunile maxime conform tipologiei

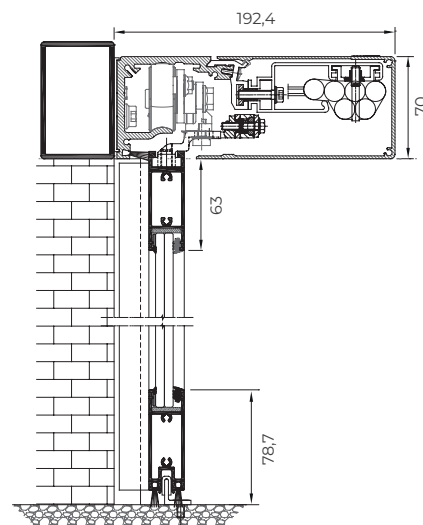

POSIBILITATI DE DESCHIDERE



Deschidere automata

Glisanta 1 cercevea si 1 fix

Glisanta 2 cercevele si 2 fixe