

2000

Glisanta Perimetrala

Glisante

Sistem glisanta cu cercevea dreapta, curbata sau tesita.



Sectiuni

Toc 40 mm singura cale de rulare
40 / 45 / 60 / 70 mm 2 cai de rulare
80 mm 3 cai de rulare
Cercevea dreapta sau tesita 26 mm
Cercevea curbata 27,5 mm

Grosime Profil

Fereastra 1,5 mm

Vitrare

Max. 17 mm, Min. 3 mm


Dimensiuni maxime cercevea

Latime (L) 1600 mm
Inaltime (H) 2600 mm

Greutate maxima cercevea

160 Kg

Consultati greutatea si dimensiunile maxime conform tipologiei

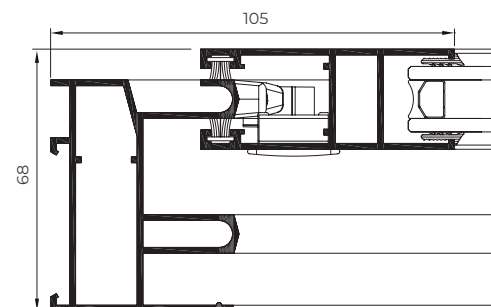

Posibilitati estetice:


Cercevea: Dreapta, curbata sau tesita
Bagheta: Dreapta sau curbata

CARACTERISTICI

Coeficient de transfer termic		$U_w \geq 2,9 \text{ (W/m}^2\text{K)}$
Izolare acustica		Rw pana la 33 dB
Permeabilitate la aer		Clasa 3
Etanseitate la apa		Clasa 8A
Rezistenta la vant		Clasa C5

Test de referinta 1,20 x 1,20 m / 2 foi

POSSIBILITATI DE DESCHIDERE

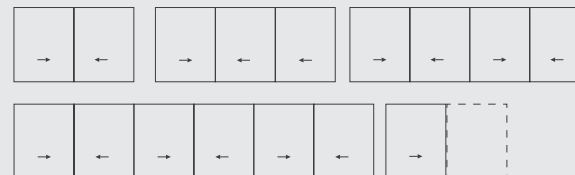

Glisanta
1, 2 si 3 cai de rulare
Optiune de
Optiune de 1 si 3 cai de rulare