


PROTECTIE SOLARA LAMELE

Protectie
Solara

Solutie eficienta pentru a controla incidenta razelor solare asupra temperaturii interioare a unei cladiri. Radiatia solara este absorbita si reflectata de aceste lamele exterioare, favorizand eficienta energetica a proprietatii si reducand necesitatea racirii artificiale. In acelasi timp, acestea functioneaza ca un element decorativ, oferind o estetica avangardista fatadei.

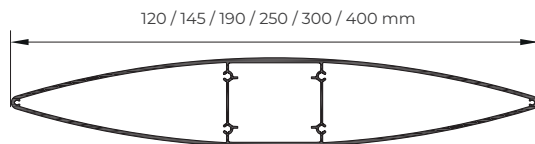

Tipuri de lamele

Fixe: Reglaj 0°, 15°, 30° sau 45°.

Mobile: motorizat si manual.

Dimensiuni lamele	Lungime max. recomandata a lamele fixe	Lungime max. recomandata a lamele mobile
120 mm	1,8 m	
145 mm	2,2 m	1,9 m
190 mm	2,5 m	2,4 m
250 mm	3,0 m	3,0 m
300 mm	3,5 m	3,4 m
400 mm	4,2 m	4,0 m

Conform specificatiilor proiectului, lamele vor putea avea lungimi mai mari (consulta).

Grosimi profile

Lamele	Grosime
120 mm	1,25 mm
145 mm	1,35 mm
190 mm	1,70 mm
250 mm	1,90 mm
300 mm	2,00 mm
400 mm	2,50 mm



Rezistenta la sarcina de vant Clasa 6 (max.)

Proba de referinta

Lamele	Lungime
120 mm	1,8 m
145 mm	2,2 m
190 mm	2,5 m
250 mm	3,0 m
300 mm	3,5 m
400 mm	4,2 m

Proba realizata conform normei UNE 1932