

TAMIZ OBLOANE

Protectie
Solara


Sistem cu deschidere batant, glisare sau pliere cu lamele fixe sau reglabile.

CARACTERISTICI

Rezistenta termica a oblonului si a camerei  $\Delta R = 0,08 \text{ (m}^2\text{K/W)}$

Rezistenta la vant  Clasa 5

Test de referinta 1,50 x 1,50 m / 2 foi

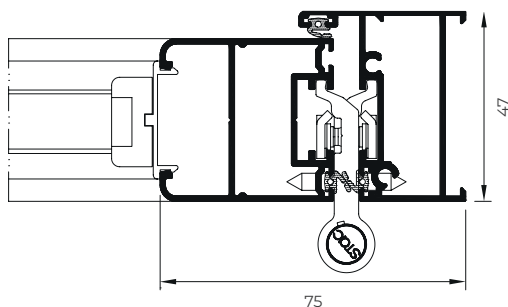

Sectioni

Toc 47 mm

Cercevea 40 mm

Grosime Profil

Fereastră 1,3 mm

Usa 1,5 mm

Greutate maxima cercevea

Batanta 65 kg

Plianta 50 kg

Glisanta 120 kg

Dimensiuni maxime cercevea

Batanta:

Latime (L) 1600 mm, Inaltime (H) 2500 mm

Plianta:

Latime (L) 700 mm, Inaltime (H) 2500 mm

Glisanta:

Latime (L) 2000 mm, Inaltime (H) 3500 mm

Coefficient de transfer termic

Uw transmitanta fereastră

Uws transmitanta cuplu fereastră-oblon

Uw(W/m²K)	Uws(W/m²K)
0,8	0,75
1,0	0,93
1,2	1,09
1,4	1,26
1,6	1,42
1,8	1,57
2,0	1,72
2,2	1,87
2,4	2,01
2,6	2,15
2,8	2,29
3,0	2,42
3,2	2,55



Posibilitati de inchidere

Inchidere cu lamele fixe sau orientate oblic

Inchidere opaca (panel sandwich)

Vitraj cu sticla

POSSIBILITATI DE DESCHIDERE



Batanta
Glisanta
Plianta

