

C 70

Glisanta

PVC

Sistem glisant pentru ferestre si usi de balcon cu o adancime a tocului de 70 mm cu performante termice si acustice optime. Posibilitatea unui nod central minimalist de 30 mm.

CARACTERISTICI

Coeficient de transfer termic		$U_f \geq 1,3 \text{ (W/m}^2\text{K)}$
Izolare acustica		Rw pana la 38 dB
Permeabilitate la aer		Clasa 4
Etanseitate la apa		Clasa 7A
Rezistenta la vant		Clasa C5

Test de referinta 1,23 x 1,48 m / 2 foi

POSIBILITATI





FERONERIE
SIGURANTA



ACCESIBILITATE

POSIBILITATI DE DESCHIDERE

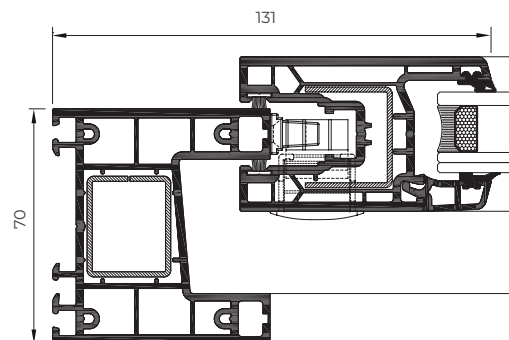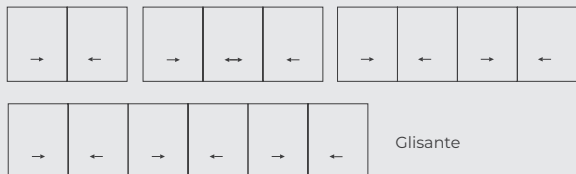

Sectioni

Toc 70 mm, Cercevea 46 mm

Vitrare

Max. 26 mm, Min. 4 mm

Dimensiuni maxime cercevea

Fereasta:

Latime (L) 1400 mm

Inaltime (H) 1800 mm

Balcon:

Latime (L) 1800 mm


Inaltime (H) 2600 mm


Greutate maxima cercevea

70 kg Fereasta

200 Kg Balcon


Consultati greutatea si dimensiunile maxime conform tipologiei

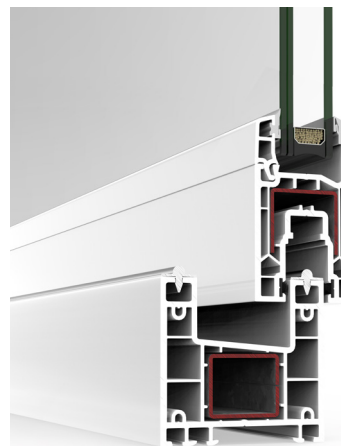

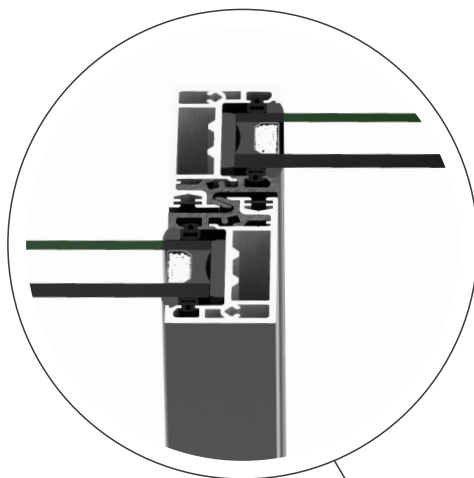

NOD CENTRAL MINIMALIST

Posibilitatea unui nod central minimalist de 30 mm

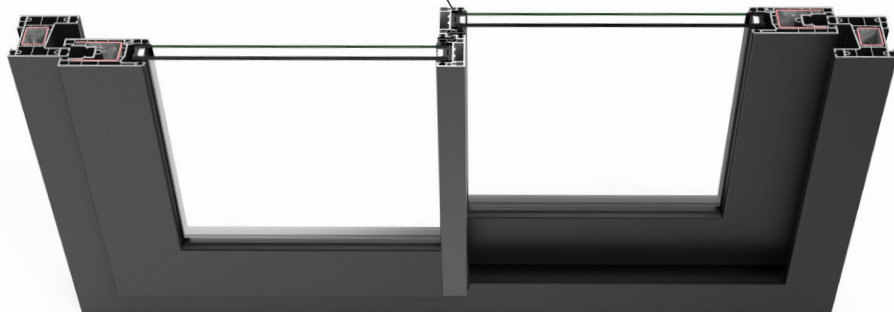

C 70 GLISANTA

